

# SCIFP 48V系列

## SCIFP48100

48V





### 优势

- 
- 
- 
- /
- 
- 
- BMS


- a.**
- YD/T 2344

- b. MS**
- ISO 9001
  - ISO 14001
  - OHSAS 18001




	SCIFP48100
	51.2V
	100Ah(25 ,0.2C)
	5120Wh
	149.8Wh/dm <sup>3</sup>
	111.3 Wh/kg
	440mm
	222mm(5U)
	350mm
	46 Kg
	43.2 57.6V
	56.0 57.6V
	100A
	100A
	99% (+20°C)
	94% (+20°C)
( )	RS485
	\
	0°C +55°C
	-20 +60°C
	-20°C +60°C
	IP20


(25 )										
/V \ /A /h	0.1C	0.2C	0.3C	0.4C	0.5C	0.6C	0.7C	0.8C	0.9C	1.0C
	48.0	9.465	4.852	3.250	2.418	1.924	1.588	1.355	1.179	1.039
46.4	9.912	4.942	3.302	2.452	1.960	1.617	1.386	1.199	1.070	0.959
44.8	9.960	4.992	3.341	2.493	1.988	1.638	1.396	1.219	1.079	0.969
43.2	10.099	5.039	3.355	2.507	2.000	1.658	1.405	1.229	1.089	0.979

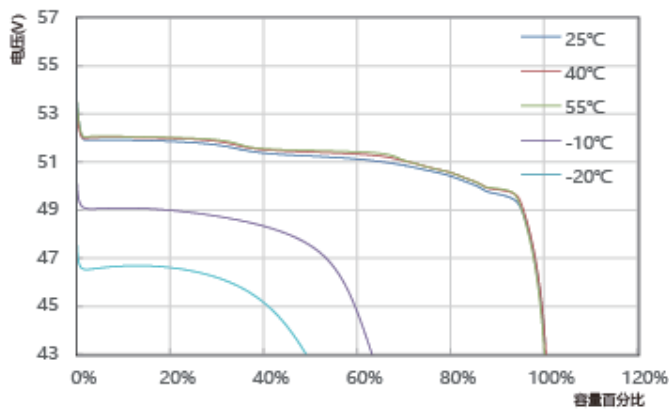


不同温度下放电曲线

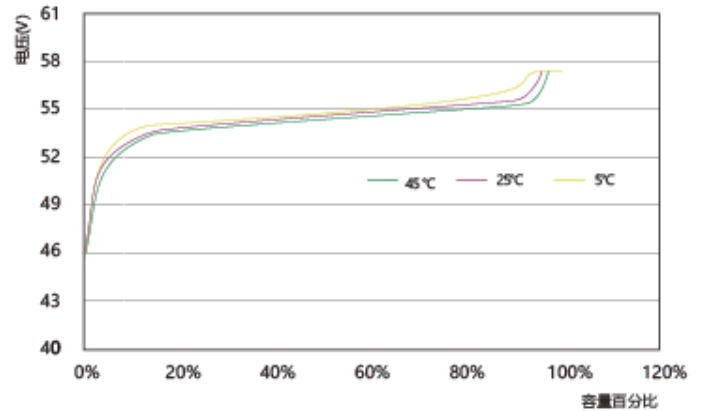


不同温度下充电曲线

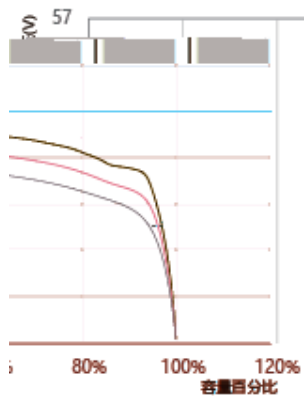

放电曲线 (25°C)

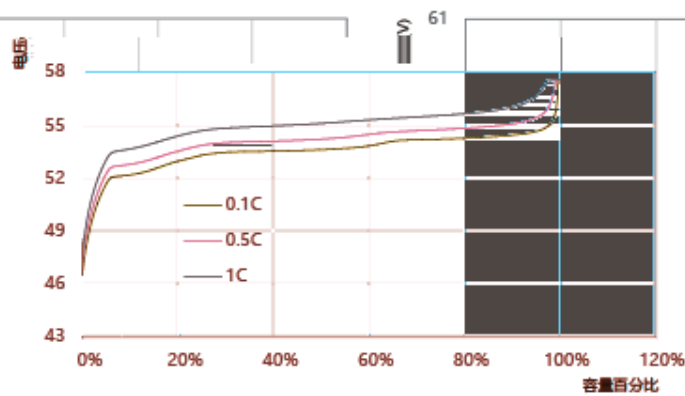

不同倍率下的充电曲线 (25°C)

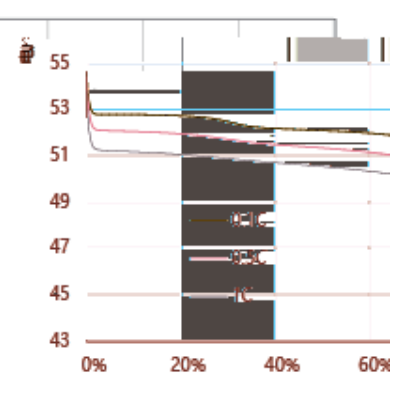

不同倍率下放电曲线